




Premium quality high-visibility 13 gauge cut level F sandy nitrile coated glove for general and challenging work environments. One of the best sellers.

KEY FEATURES

- **Premium quality cut protection level F** glove with great abrasion resistance.
- **High visibility yellow** provides extra safety in challenging light conditions and easy to recognise.
- **Reinforced thumb crotch** enhances durability in a high-wear area and extends glove service life.
- **Sandy nitrile palm coating** delivers reliable grip and abrasion resistance in dry and lightly oily conditions.
- **Soft, flexible construction** provides a comfortable, close-fitting feel for extended wear.
- **Touchscreen compatible** for convenient operation of touchscreen devices.
- **360° breathability** to keep hands cool.
- **Contact heat protection** up to 100 °C according to EN407.

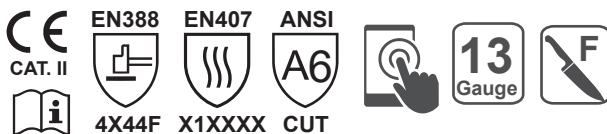

PRODUCT DETAILS

Liner	UHMWPE, Steel Fiber, Glass Fiber
Gauge	13
Coating	Nitrile
Finishing	Sandy
Colour	Yellow / Black
Size	6,7,8,9,10,11
Packing	12 pairs/pack, 144 pairs/carton
Tariff number	61161020

RECOMMENDED APPLICATIONS

General purpose or works with high cut hazard or contact heat hazard in dry or light oily conditions or challenging light conditions.

Such as handling sharp or rough parts, outdoor works, automotive industry, mining, construction, metal sheet works, maintenance, assembly, inspection...



CERTIFICATION

CE EN ISO 21420:2020

Category II

**EN388:2016 Mechanical protection:
levels obtained in laboratory tests**

Abrasion (min.0 to max. 4): **4**
Blade cut - coupe test (Index) (min.0 to max. 5): **X**
Tear (min.0 to max. 4): **4**
Puncture (min.0 to max. 4): **4**
Cut resistance from sharp objects EN ISO
13997:1999 (min. A to max. F, X - not tested): **F**
Impact protection (P if pass, F if failed): **-**

EN388:2016



EN407:2020 Heat protection:

levels obtained in laboratory tests

A - Limited flame spread X of 4
B - Contact heat: 1 of 4
C - Convective heat: X of 4
D - Radiant heat: X of 4

E - Small splashes of molten metal: X of 4
F - Large quantities of molten metal: X of 4

EN407:2020



X1XXXX

X = not tested or testing method is unsuitable for the design
of the gloves.

EN ISO 21420:2020 Dexterity (min.0 to max.5):
level 5.

STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general.

The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 12-387 can normally be 5 years.

CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

WARNING

Don't use in case of chemicals or electrical risk.

Please ensure the products are strictly used within their protection levels.

Never wear gloves when operating machinery with accessible rotating or other moving parts.

